




# LAPPS

INNLED®  
#madeinfrance

Control one or several lamps from a distance thanks to L'APPS, the connected application. Thanks to a simple and intuitive interface, you can access a variety of colours, adjust the light intensity and chose the appropriate effects for your event.

To adapt the light to your atmosphere, chose between the Basic or the Expert mode. Select your colour from a basic range or create your own composition with the interactive console.

L'APPS is connected to a wifi / wireless DMX transmitter allowing a simplified connexion within all your spaces.



1. SIMPLE  
&  
INTUITIVE

2. WiFi  
&  
WIRELESS DMX

3. CUSTOM  
LIGHTING



## BASIC Mode


The simplicity of the lay-out makes this page accessible to everyone. You will find an overall intensity setting, a range of 9 colours and 3 pre-programmed effects : Pixel, Chase and Rainbow.




## EXPERT Mode

Within this mode, two pages are available. The **Selection page** allows you to choose the light(s) to set in motion.

The **Settings page** gives access to an interactive console allowing you to vary the colours of the selected lamps, in order to create your own composition. This page also includes a general intensity setting and 6 pre-programmed effects : 2 Pulse, 2 Rainbow, 1 Chase and 1 Pixel.

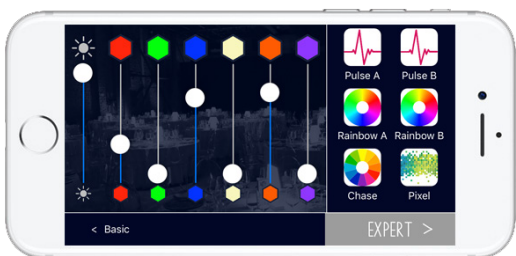

Selection page

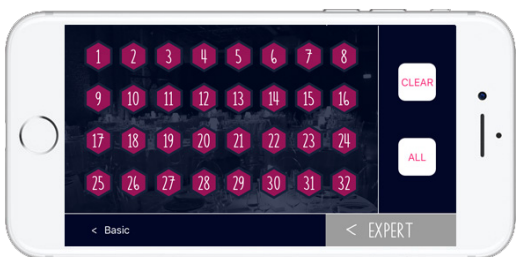

Settings page

## DMX TRANSMITTER



## TECHNICAL SPECIFICITIES

### APP

OS (Free download)

- Apple IOS 10
- Android 4.X

WEIGHT

- 683 Ko

ACCESS

- Wifi, 2,4GHz band

BASIC MODE

- General intensity
- Warm white + 8 colours
- 3 effects (rainbow, chase, pixel)

EXPERT MODE

- Settings page with :
  - 6 effects (2 Pulses, 2 Rainbows, Pixel, Chase)
  - 5 cursors (intensity, R, G, B, warm white)
  - 10 fade 3s up/down on Intensity, R, G, B, Warm white
- Selection page from 1 to 32 lamps

ADDRESSING

- Fixed, for 32 lamps of 6 DMX channels : dimmer, strobe, red, green, blue, warm white

CONCERNED PRODUCTS

- HARIZ
- TECNOPAK
- KUB
- TOTEM (soon)

### BOITIER

### WIFI / WIRELESS DMX

WIFI HOT-SPOT

- Connexion for the application
- Configurable SSID and password
- 2,4GHz band, 20db (100mW)
- 14 selectable channels
- Entry 1 Art-Net universe

DMX HF

- Integrated transmitter
- 2,4GHz band
- 512 DMX channels
- Entries
  - DMX in on XLR3
  - « OPEN DMX » on USB
  - Art-Net in (on access point)
- Buffer on DMX out
- Open field range 300m
- DMX addressing via Menu
- 21 selectable frequencies
- 31 DMX universes
- Diversity mode 2 channels
- No latency, even on a flash

CONNEXIONS

- DMX in and out on XLR 5
- Open DMX on USB

POWER SUPPLY

- Supplied. DC 5V USB

NORMS

- W2.4EC-DMX-A
- IP20 IK06
- Class II

DIMENSIONS AND WEIGHT

- 100 x 80 x 48 mm
- 0,25kg

TEMPERATURE RANGE

- 0°C to +40°C

WARRANTY

- 2 years

